

Hiproblanket Wrap Heavy red



BLANKET FROM WOVEN GLASS FIBRE YARNS, WITH RED IRON-OXIDE SILICON RUBBER AND HOOK & LOOP CLOSURE

The heatprotection of Hiproblanket in a split retro-fit form for quick installation on existing cables and hoses. Resistant to hydraulic fluids, lubricating oils and fuels, Hiproblanket Wrap protects against molten splash, occasional flames, energy loss in piping and hoses; also protects employees from burns; allows "bundling" of wires, hoses and cables. Hiproblanket Wrap is standard available up to 95 mm in diameter and allows quick installation on site without the need to dismantle and reconnect fittings. Also repair of existing installations can be performed with a minimum of labor and downtime. Typically used in the basic glass, ceramics and steel industry.

Material & Construction:

Construction: Remountable sleeve from woven E-glass blanket, with polyester hook & loop closure.

Cover specifications: Iron-oxide silicon rubber, excellent oil resistant, halogen free, good short term flame protection, good temperature reduction, withstands molten splash.

Weight material: 3,26 kg/m²

Temperature: -55 °C till +260 °C continuous.

- Under flame till +800 °C for approx. 20 minutes.

- Radiation heat till +800 °C for approx. 20 minutes.

- Molten metal splash till +1640 °C for 15 - 30 seconds.


Temperature Wrap closure: +110 °C continuous. For higher temperatures additional securing with hiprosiltape is recommended.

Colour: Red.



| HIPOBLANKET WRAP H | | | DIAMETRE | | RANDOM LENGTH | | SMALL CARTON | | REELS | | WEIGHT |
|--------------------|-------------|----------|-------------|--------------|---------------|-----------------|--------------|-----------------|-------|-----------------|--------|
| Size (mm) | Size (inch) | Type | Inside (mm) | Outside (mm) | Metre | Article No. red | Metre | Article No. red | Metre | Article No. red | (kg/m) |
| 25 | 1" | HBW-H-16 | 25 | 32 | 1 | 336.525.0 | 15 | 336.525.1 | 45 | 336.525.6 | 0,41 |
| 32 | 1.1/4" | HBW-H-20 | 32 | 39 | 1 | 336.532.0 | 15 | 336.532.1 | 45 | 336.532.6 | 0,48 |
| 38 | 1.1/2" | HBW-H-24 | 38 | 45 | 1 | 336.538.0 | 15 | 336.538.1 | 45 | 336.538.6 | 0,54 |
| 44 | 1.3/4" | HBW-H-28 | 44 | 51 | 1 | 336.544.0 | 15 | 336.544.1 | 45 | 336.544.6 | 0,6 |
| 51 | 2" | HBW-H-32 | 51 | 58 | 1 | 336.551.0 | 15 | 336.551.1 | 45 | 336.551.6 | 0,66 |
| 57 | 2.1/4" | HBW-H-36 | 57 | 64 | 1 | 336.557.0 | 15 | 336.557.1 | 45 | 336.557.6 | 0,73 |
| 64 | 2.1/2" | HBW-H-40 | 64 | 71 | 1 | 336.564.0 | 15 | 336.564.1 | 45 | 336.564.6 | 0,8 |
| 70 | 2.3/4" | HBW-H-44 | 70 | 77 | 1 | 336.570.0 | 15 | 336.570.1 | 45 | 336.570.6 | 0,86 |
| 76 | 3" | HBW-H-48 | 76 | 83 | 1 | 336.576.0 | 15 | 336.576.1 | 45 | 336.576.6 | 0,93 |
| 83 | 3.1/4" | HBW-H-52 | 83 | 90 | 1 | 336.583.0 | 15 | 336.583.1 | 45 | 336.583.6 | 1 |
| 89 | 3.1/2" | HBW-H-56 | 89 | 96 | 1 | 336.589.0 | 15 | 336.589.1 | 45 | 336.589.6 | 1,06 |
| 95 | 3.3/4" | HBW-H-60 | 95 | 102 | 1 | 336.595.0 | 15 | 336.595.1 | 45 | 336.595.6 | 1,12 |

Hiproblanket Wrap Heavy red with turnbuckles

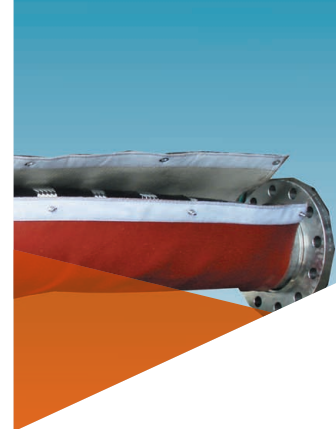

BLANKET FROM WOVEN GLASS FIBRE YARNS, WITH RED IRON-OXIDE SILICON RUBBER, HOOK & LOOP CLOSURE AND TURNBUCKLES

The heatprotection of Hiproblanket in a split retro-fit form for quick installation on existing cables and hoses. Resistant to hydraulic fluids, lubricating oils and fuels, Hiproblanket Wrap with turnbuckles protects against molten splash, occasional flames, energy loss in piping and hoses; also protects employees from burns; allows "bundling" of wires, hoses and cables. Hiproblanket Wrap with turnbuckles is standard available up to 305 mm in diameter and allows quick installation on site without the need to dismantle and reconnect fittings. Also repair of existing installations can be performed with a minimum of labor and downtime. Typically used in the basic glass, ceramics and steel industry.

Material & Construction:

Construction: Remountable sleeve from woven E-glass blanket, with polyester hook & loop closure and with at every 30 cm an additional nickel plated brass turnbuckle.

Cover specifications: Iron-oxide silicon rubber, excellent oil resistant, halogen free, good short term flame protection, good temperature reduction, withstands molten splash.

Weight material: 3,26 kg/m²

Temperature: -55 °C till +260 °C continuous.

- Under flame till +800 °C for approx. 20 minutes.
- Radiation heat till +800 °C for approx. 20 minutes.
- Molten metal splash till +1640 °C for 15 - 30 seconds.

Temperature Wrap closure: +110 °C continuous.

For higher temperatures additional securing with hiprosiltape is recommended.

Colour: Red.



| HIPOBLANKET WRAP H - TB | | | DIAMETRE | | RANDOM LENGTH | | SMALL CARTON | | REELS | | WEIGHT |
|-------------------------|-------------|-------------|-------------|--------------|---------------|-----------------|--------------|-----------------|-------|-----------------|--------|
| Size (mm) | Size (inch) | Type | Inside (mm) | Outside (mm) | Metre | Article No. red | Metre | Article No. red | Metre | Article No. red | (kg/m) |
| 102 | 4" | HBW-HTB-64 | 102 | 109 | 1 | 336.940.0 | 15 | 336.940.1 | 45 | 336.940.6 | 1,29 |
| 114 | 4.1/2" | HBW-HTB-72 | 114 | 121 | 1 | 336.945.0 | 15 | 336.945.1 | 45 | 336.945.6 | 1,41 |
| 127 | 5" | HBW-HTB-80 | 127 | 134 | 1 | 336.950.0 | 15 | 336.950.1 | 45 | 336.950.6 | 1,55 |
| 140 | 5.1/2" | HBW-HTB-88 | 140 | 147 | 1 | 336.955.0 | 15 | 336.955.1 | 45 | 336.955.6 | 1,68 |
| 152 | 6" | HBW-HTB-96 | 152 | 159 | 1 | 336.960.0 | 15 | 336.960.1 | 45 | 336.960.6 | 1,8 |
| 165 | 6.1/2" | HBW-HTB-104 | 165 | 172 | 1 | 336.965.0 | 15 | 336.965.1 | 45 | 336.965.6 | 1,93 |
| 178 | 7" | HBW-HTB-112 | 178 | 185 | 1 | 336.970.0 | 15 | 336.970.1 | 45 | 336.970.6 | 2,07 |
| 191 | 7.1/2" | HBW-HTB-120 | 191 | 198 | 1 | 336.975.0 | 15 | 336.975.1 | 45 | 336.975.6 | 2,2 |
| 203 | 8" | HBW-HTB-128 | 203 | 210 | 1 | 336.980.0 | 15 | 336.980.1 | 45 | 336.980.6 | 2,32 |
| 216 | 8.1/2" | HBW-HTB-136 | 216 | 223 | 1 | 336.985.0 | 15 | 336.985.1 | 45 | 336.985.6 | 2,45 |
| 229 | 9" | HBW-HTB-144 | 229 | 236 | 1 | 336.990.0 | 15 | 336.990.1 | 45 | 336.990.6 | 2,59 |
| 241 | 9.1/2" | HBW-HTB-152 | 241 | 248 | 1 | 336.991.0 | 15 | 336.991.1 | 45 | 336.991.6 | 2,71 |
| 254 | 10" | HBW-HTB-160 | 254 | 261 | 1 | 336.992.0 | 15 | 336.992.1 | 45 | 336.992.6 | 2,84 |
| 267 | 10.1/2" | HBW-HTB-168 | 267 | 274 | 1 | 336.994.0 | 15 | 336.994.1 | 45 | 336.994.6 | 2,98 |
| 279 | 11" | HBW-HTB-176 | 279 | 286 | 1 | 336.996.0 | 15 | 336.996.1 | 45 | 336.996.6 | 3,1 |
| 292 | 11.1/2" | HBW-HTB-184 | 292 | 299 | 1 | 336.998.0 | 15 | 336.998.1 | 45 | 336.998.6 | 3,24 |
| 305 | 12" | HBW-HTB-192 | 305 | 312 | 1 | 336.999.0 | 15 | 336.999.1 | 45 | 336.999.6 | 3,37 |

Hiproblanket Wrap Medium red



BLANKET FROM WOVEN GLASS FIBRE YARNS, WITH RED IRON-OXIDE SILICON RUBBER AND METAL HOOK & LOOP CLOSURE

The Hiproblanket Medium in a split retro-fit form is an economical solution for quick installation on existing cables and hoses. Resistant to hydraulic fluids, lubricating oils and fuels, Hiproblanket Medium Wrap provides protection against molten splash, occasional flames; allows "bundling" of wires, hoses and cables. Due to the strong design of Hiproblanket Wrap Medium with a metal hook and aramid fleece allows quick installation on site without the need to dismantle and reconnect fittings. Also repair of existing installations can be performed with a minimum of labour and downtime. Typically used in the basic industry.

Material & Construction:

Construction: Remountable sleeve from glass fibre yarns.

Cover specifications: Silicon rubber, single-sided, excellent oil resistant, halogen free, limited short term flame protection, good temperature reduction, withstands small particles of molten splash. The hook is made from stainless steel and the loop is from aramid fleece material.

Weight material: 2,00 kg/m².

Temperature: -55 °C till +230 °C continuous.

- Under flame till +800 °C for approx. 20 minutes.
- Radiation heat till +800 °C for approx. 20 minutes.
- Molten metal splash till +1640 °C for 15 - 30 seconds.


Temperature hook and loop: -55 °C till +300 °C continuous. Radiation heat till +500 °C for approx. 20 minutes.

Colour: Red.



| HIPOBLANKET WRAP M | | | DIAMETRE | | RANDOM LENGTH | | SMALL CARTON | | REELS | | WEIGHT |
|--------------------|-------------|-----------|-------------|--------------|---------------|-----------------|--------------|-----------------|-------|-----------------|--------|
| Size (mm) | Size (inch) | Type | Inside (mm) | Outside (mm) | Metre | Article No. red | Metre | Article No. red | Metre | Article No. red | (kg/m) |
| 32 | 1 1/4" | HBW-MM-20 | 32 | 39 | - | - | 15 | 356.732.3 | - | - | 0,48 |
| 38 | 1 1/2" | HBW-MM-24 | 38 | 40 | - | - | 15 | 356.738.3 | - | - | 0,54 |
| 51 | 2" | HBW-MM-32 | 51 | 53 | - | - | 15 | 356.751.3 | - | - | 0,66 |
| 76 | 3" | HBW-MM-48 | 76 | 78 | - | - | 15 | 356.776.3 | - | - | 0,93 |
| 102 | 4" | HBW-MM-64 | 102 | 104 | - | - | 15 | 356.799.3 | - | - | 1,12 |

Hiproblanket Wrap Light grey

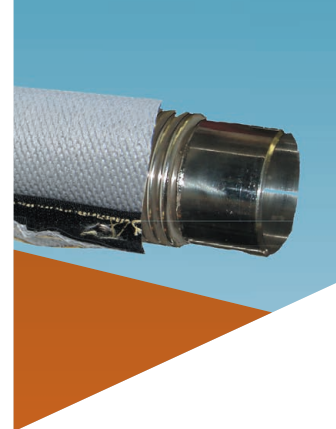

BLANKET FROM WOVEN GLASS FIBRE YARNS, WITH THIN DOUBLE LAYER OF SILICON RUBBER AND HOOK & LOOP CLOSURE

The Hiproblanket Light in a split retro-fit form is an economical solution for quick installation on existing cables and hoses. Resistant to hydraulic fluids, lubricating oils and fuels, Hiproblanket Wrap Light provides limited protection against molten splash, occasional flames; allows "bundling" of wires, hoses and cables. Hiproblanket Wrap Light allows quick installation on site without the need to dismantle and reconnect fittings. Also repair of existing installations can be performed with a minimum of labor and downtime. Typically used in the basic industry.

Material & Construction:

Construction: Remountable sleeve from glass fibre yarns.

Cover specifications: Silicon rubber, double-sided, excellent oil resistant, halogen free, limited short term flame protection, limited temperature reduction, withstands small particles of molten splash.

Weight material: 1,1 kg/m².

Temperature: -55 °C till +260 °C continuous.

- Under flame till +538 °C for approx. 20 minutes.

- Radiation heat till +538 °C for approx. 20 minutes.

- Molten metal splash till +1200 °C for 15 - 30 seconds.

Temperature Wrap closure: +110 °C continuous. For higher temperatures additional securing with hiprosiltape is recommended.

Colour: Grey.



| HIPOBLANKET WRAP L | | | DIAMETRE | | RANDOM LENGTH | | SMALL CARTON | | REELS | | WEIGHT |
|--------------------|-------------|----------|-------------|--------------|---------------|------------------|--------------|------------------|-------|------------------|--------|
| Size (mm) | Size (inch) | Type | Inside (mm) | Outside (mm) | Metre | Article No. grey | Metre | Article No. grey | Metre | Article No. grey | (kg/m) |
| 25 | 1" | HBW-L-16 | 25 | 27 | 1 | 337.725.0 | 15 | 337.725.1 | 30 | 337.725.3 | 0,02 |
| 38 | 1.1/2" | HBW-L-24 | 38 | 40 | 1 | 337.738.0 | 15 | 337.738.1 | 30 | 337.738.3 | 0,04 |
| 51 | 2" | HBW-L-32 | 51 | 53 | 1 | 337.751.0 | 15 | 337.751.1 | 30 | 337.751.3 | 0,08 |
| 64 | 2.1/2" | HBW-L-40 | 64 | 66 | 1 | 337.764.0 | 15 | 337.764.1 | 30 | 337.764.3 | 0,15 |
| 76 | 3" | HBW-L-48 | 76 | 78 | 1 | 337.776.0 | 15 | 337.776.1 | 30 | 337.776.3 | 0,2 |
| 89 | 3.1/2" | HBW-L-56 | 89 | 91 | 1 | 337.789.0 | 15 | 337.789.1 | 30 | 337.789.3 | 0,3 |
| 102 | 4" | HBW-L-64 | 102 | 104 | 1 | 337.799.0 | 15 | 337.799.1 | 30 | 337.799.3 | 0,4 |